

# PaliKrom 125

## Colored Quartz Epoxy Flooring



### All Purpose Multi-Color Flooring System

Formulated specifically for institutional, commercial and industrial usage. PalmaLite PaliKrom 125 (nominal 1/8") is Palma's general purpose colored quartz epoxy flooring system, with excellent chemical resistance. Encompassing a wide range of environments from light to industrial, it is an ideal floor for areas such as pharmaceutical environments, veterinary hospitals, prisons, school rooms, lockers, showers, sales areas and areas where a rich colored quartz "tweed look" is desired. The textured surface is slip-resistant, meeting all ADA and ASTM and ANSI B101.1 requirements. PaliKrom 125 comes in 12 standard designer colors to match almost any architectural motif.

### Certified Waterproof by Independent Laboratory

All PalmaLite epoxy flooring systems are certified to be waterproof which eliminates the need for an independent waterproof membrane. This results in a cost saving of 20 to 30 percent over

competitive products that recommend membranes for waterproofing.

### Costs up to 30% less

A new PaliKrom 125 floor provides years of dependable service while outlasting concrete 3 to 1. A 1/4" epoxy floor is generally not needed, accounting for a potential savings of 30 percent.


### Meets Most LEEDS and VOC Requirements

PaliKrom 125 is now certified to meet strict VOC requirements including "EPA 24" testing for your next "Green" project. Independent laboratory testing results are available

### No Seams to Trap Dirt or Bacteria

PaliKrom 125 cleans up easily. Its uniform, non-porous surface is free of seams, trowel marks, and depressions. PaliKrom 125 will not support bacterial and fungal growth, making it an ideal floor for "clean environments".

### Floor Components

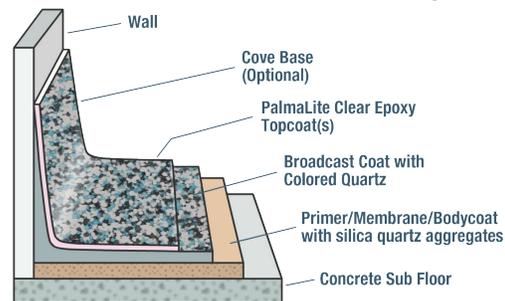


### Standard Blends



Cinnabar



Denim



Graphite




Quarry




Green




Jade



Marine




Pewter



Aztec



Adobe



Onyx



Goldmist

This color chart is a guide only. Final selection should be made from an actual sample

# PaliKrom 125

## Colored Quartz Epoxy Flooring

### PRODUCT NAME

**PalmaLite PaliKrom 125 (1/8")**  
Seamless Colored Quartz Epoxy Flooring

### FORMULATOR

**Palma Inc.**  
628 NJ Rte. 10W  
Suites 2&3  
Whippany, NJ 07981  
Phone:800.336.7256 | Fax:973.429.2149  
Website: [www.palmainc.com](http://www.palmainc.com)

### PRODUCT DESCRIPTION

**a. Basic Uses:** PalmaLite PaliKrom 125 is a combination trowel broadcast self-leveling ,decorative and functional system applied at a nominal 125 mils (1/8") for use over properly designed new and existing dry concrete. PalmaLite PaliKrom 125 is ideally used in commercial, industrial and institutional facilities for light to heavy traffic and aggressive atmospheres. Exhibiting excellent resistance to abrasion, physical impact, inorganic and organic acids, solvents, alkalis, fungus and bacteria, its dense non-porous consistency also provides exceptional electrical insulation, waterproofing, low shrinkage and adhesive strength. PalmaLite PaliKrom 125 can be used to form an integral matching cove base and can be applied as a wainscot or wall surface. Cove Base: Feather-edged at the top to a straight clean line to the specified height. PalmaLite PaliKrom 125 cove base can hide

joints from ceramic and quarry tile as well as concrete block.

**Wainscoting/Walls:** Can be applied over block walls, sheetrock, greenboard, hardie board, plywood or cement board @ 60 mils

**b. Composition:** PalmaLite PaliKrom 125 is composed of 100% solids, combination 1 part hardener, 2 parts resin, special graded silica quartz aggregates and colored quartz aggregates. Non-toxic, low odor, **PalmaLite PaliKrom 125** is a 100% solid system. **PalmaLite PaliKrom 125** meets or exceeds most VOC requirements.

**c. Finish:** Gloss, decorative, bright, easy to maintain, non-porous, slip-resistant, free of seams, trowel marks and depressions.

**d. Colors:** 12 Standard colors: Cinnibar, Denim, Graphite, Quarry, Green, Jade, Marine, Pewter, Aztec, Adobe, Onyx and Goldmist . Custom colors are available with premium charges.

**e. Limitations:** For new concrete design concrete for local conditions to prevent osmosis, hydrostatic and vapor pressure to eliminate the possibility of sporadic blistering and delamination. Test existing slab on grade concrete for moisture vapor transmission. Maintain substrate and air temperature between 60° and 85° F with proper ventilation, permanent lighting, permanent heating or air conditioning during application and curing. Where temperatures over 160° degrees F, hot water and steam are constant or highly corrosive reagents exist, use PalmaLite Novolac systems.

**f. Applicable Standards:** Military, ASTM, ACI, ANSI standards or procedures. Detailed specification available

### PREPARATION & APPLICATION

**1. General:** New and Existing Surfaces:

**a.** Prepare substrate in compliance with Committee C.03 ASTM C-811 Standard Practice for Surface Preparation of Concrete for Application of Resinous Monolithic Surfaces and for Application of Resinous Monolithic Surfacing and formulator's written instructions for substrate indicated.

**b.** Surface must be structurally sound, free of contaminants and loose materials

**c.** Clean and fill joints and cracks wider than 1/16" with PaliFlex joint filler.

**d.** Sawcut or Chisel concrete substrate at termination points," keying in" to maintain minimum thickness of floor coating.

**e.** Tape at termination points and adjacent surfaces not to be coated with appropriate tape before each application is applied remove before dry.

**f.** Remove tape before each application dries.

**Application: PalmaLite PaliKrom 125**

**a.** Trowel Primer-Membrane- Bodycoat onto surface then broadcast silica aggregate into wet epoxy and allow to dry.

**b.** Remove excess aggregate.

**c.** Apply Cove Base or other vertical surfaces when required

**e.** Trowel Broadcast Coat onto surface then broadcast colored quartz aggregate to excess. Allow to dry.

**f.** Remove excess colored quartz aggregate stone and sweep floor.

**g.** Topcoat(s): 2 clear epoxy topcoats are standard other finishes are available.

**h.** Precautions: Provide adequate ventilation and protection against contact with skin and eyes. Wear protective gloves, goggles, respirator, and shoes. Prohibit smoking and the use of spark or flame devices at all mixing and application areas.

### AVAILABILITY AND COST

**a.** Throughout the United States, Canada and abroad.

**b.** Cost varies depending on size, location and preparation.

### WARRANTY

**a.** Standard: Palma Inc. renders a joint one-year formulator/ applicator warranty against faulty workmanship or materials.

### MAINTENANCE

**a.** Clean floor daily by sweeping, mopping, (clean mop) or mechanical scrubbing with soft nylon brush as needed. Use clean water and ph neutral detergent at all times. Contact Palma Inc. for detailed information.

### TECHNICAL SERVICES

**a.** Fax or telephone **Palma Inc.** for assistance, literature, detailed specifications, preparation, application and maintenance instructions and samples.

International Testing Laboratories Inc., Newark, N.J. has completed and certified the following test results for PalmaLite Monolithic Flooring based on end use characteristics. Technical Data as follows

#### TECHNICAL DATA:

Test	Specification	ASTM C-722 Requirement	PalmaLite Result
Compressive Strength	ASTM-C579	6,000 p.s.i.	13,500 p.s.i.
Tensile Strength	ASTM-C307	1,500 p.s.i.	1,790 p.s.i.
Flexural Modules of Elasticity	ASTM-C580	0.5x10 (6)	7.03 x 10 (6)
Water Absorption	ASTM-C413	1.0% (max)	0.37% (NIL)
Thermal Coefficient of Expansion	ASTM-C531	40x10 (-6) in./in. Deg F.	1.9x10 (-5) in./in. Deg F

#### SUPPLEMENTAL TESTS:

Test	Specification	Requirement	PalmaLite Result
Coefficient of Static Friction	ASTM-C1028	0.5	0.89 Average, wet or dry
Flammability	ASTM-D635	Self-extinguishing	Self-extinguishing
Thermal Shock 5 cycles	ASTM-C884	No cracking, crazing, warping.	No cracking, crazing, warping.
Indentation (concrete)	MIL -D3134	Not more than 7%	Not more than 5% Not less than 1%
Resistance to Impact (concrete)	MIL -D3134	Not more than 1/16" (62.5 Mils)	Maximum 10 Mils
Waterproofness Test	ASTM-D4068	No evidence of moisture	No evidence of moisture
Pittsburgh Toxicity Test *	RS 5-5	Non-toxic	Non-toxic
Bond Strength **	ACI -503	175 p.s.i. (100% concrete failure)	535 p.s.i. (100% concrete failure)

#### SUPPLEMENTAL TESTS:

Test	Specification	Requirement	PalmaLite Result
Flexural Strength & Rupture	ASTM-C580	Not Cited	5,030 p.s.i.
Taber Abrasion	ASTM-D1044	Not Cited	0.05 grams loss in weight
Shore "D" Hardness	ASTM-D2240	Not Cited	83 Average
Heat Resistance, Standard Topcoat	ASTM-C884	Not Cited	140°F Continuous, 200°F Non-Continuous
Heat Resistance Novolac Topcoat	ASTM-C884	Not Cited	350°F Continuous

CHEMICALS AND SOLVENTS: For specific chemicals, solvents and high temperatures to be resisted, consult Palma Inc.

\* SGS U.S. Testing Inc., Fairfield, N.J. \*\* Law Engineering, Houston, Tx

